



CASE 4

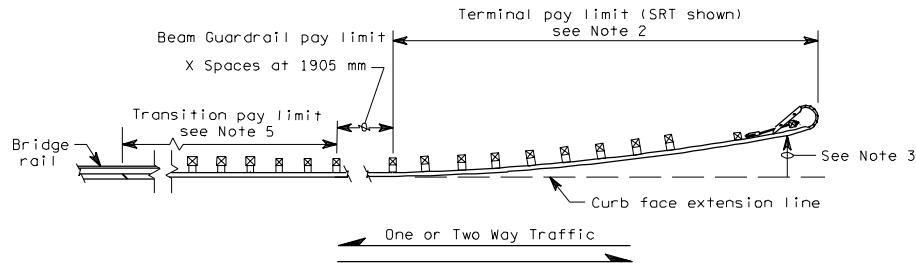

CASE 5

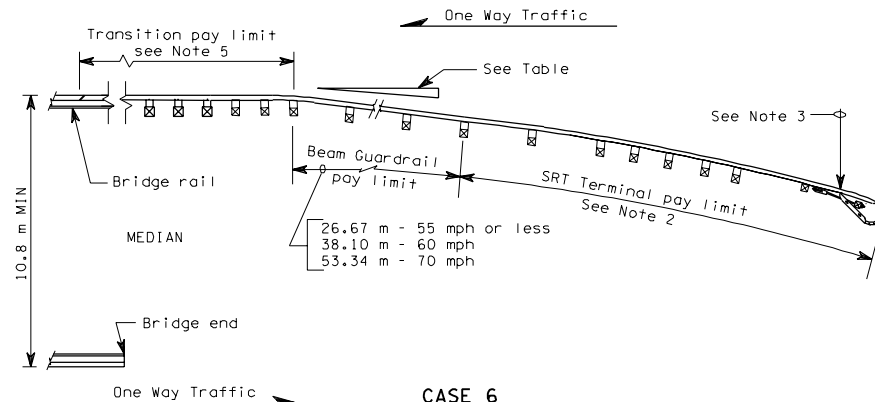

CASE 6

NOTES

1. Post spacing is 1905 mm except where noted.
2. For terminal type and details, see Contract and applicable Standard Plan(s).
3. The slope from the edge of the shoulder into the face of the guardrail should not be steeper than 10:1 when the guardrail is within 3.6 meters from the edge of the shoulder.
4. See Contract for dimensions.
5. See Contract for Guardrail Transition Section and Guardrail Connection to Bridge Rail or Concrete Barrier.

FLARE RATE TABLE	
Rate	Posted Speed (MPH)
15:1	70
13:1	60
12:1	45 to 55
9:1	40 or less

ALL DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE NOTED

GUARDRAIL PLACEMENT

STANDARD PLAN C-2a

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER

DATE

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
OLYMPIA, WASHINGTON